

Accu-Tab® chlorinators are made of rigid PVC with seven standard sizes available for industrial applications — **3012, 3075, 3150, 3530, 30600, 361000** and **481200**. PPG has an *Accu-Tab* chlorinator for nearly every requirement — from less than a pound a day to a few hundred pounds a day. The *Accu-Tab* System combines uniquely designed, patented chlorinators with slow release 68% calcium hypochlorite to provide one complete system for tablet chlorination.



Model Number	Chlorine Delivery Range (lbs/hr.)	Tablet Capacity (lbs.)	Unit Inlet Size (NFPT)	Unit Outlet Size (NFPT)	Height	Diameter
3012*	Up to 0.57	12	0.75"	1.5"	26"	9"

* Chlorinators are NSF Standard 61 certified.


How the Accu-Tab System Works

The *Accu-Tab* System is easy to install and can be integrated into any existing system with low capital investment. Once in place, the system runs simply and efficiently with little to no maintenance.



- 1 *Accu-Tab* three-inch tablets sit on top of a sieve plate inside the chlorinator.
- 2 Intake water flow to the chlorinator is adjusted to control chlorine delivery.
- 3 Untreated water rises through holes in the sieve plate contacting with bottom of tablets. The balance of the tablets remain dry.
- 4 Chlorinated water is returned to the main system flow with the appropriate amount of chlorine.

CHLORINATOR DELIVERY RATE **MODEL 3012**

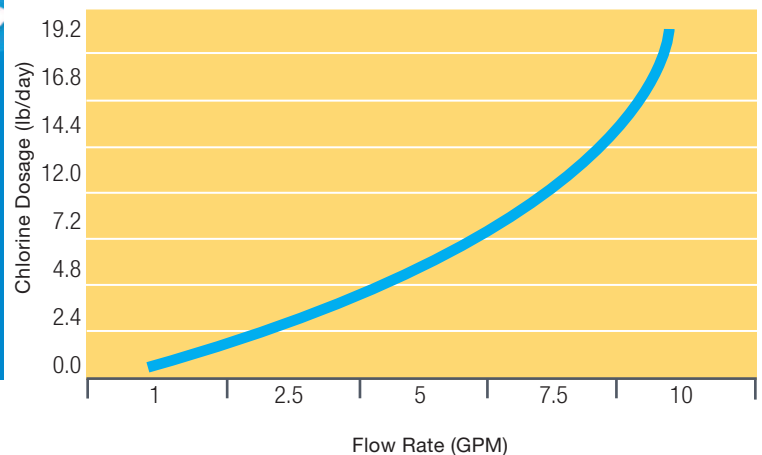

PPG Industries, Inc.
440 College Park Dr.
Monroeville, PA 15146
800-245-2974
+1 724-325-5962
Fax: +1 724-325-5047
www.accu-tab.com